



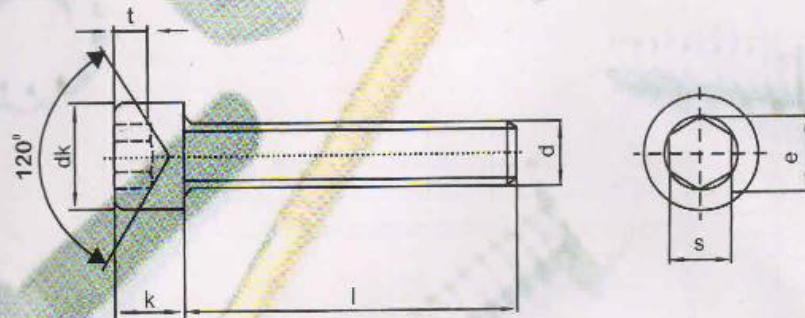

DIN 912 / ISO 4762

SOCKET HEAD

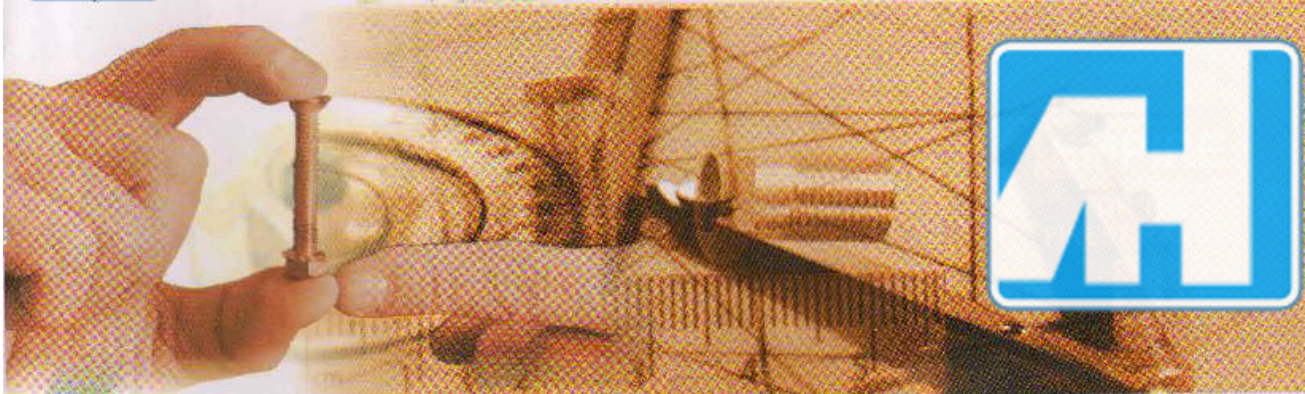

**Hexagon Socket Head Cap Screws**

Thread size d	M3	M4	M5	M6	M8	M10	M12	M16	M20
Pitch	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5
d <sub>k</sub>	min.	5.32	6.78	8.28	9.78	12.73	15.73	23.67	29.67
	max	5.68	7.22	8.72	10.22	13.27	16.27	24.33	30.33
e	min	2.87	3.44	4.58	5.72	6.86	9.15	16	19.44
	max.	3	4	5	6	8	10	16	20
k	min	2.86	3.82	4.82	5.7	7.64	9.64	11.57	19.48
	max	2.52	3.02	4.02	5.02	6.02	8.02	10.02	17.05
s	min	2.52	3.02	4.02	5.02	6.02	8.02	10.02	17.05
	max	2.58	3.08	4.09	5.14	6.14	8.14	10.17	17.23
t	min	1.3	2	2.5	3	4	5	8	10

Specs as per DIN 912  
Some specs may differ in other standards